

OR270478

Optical sensors • Retro-reflective sensors

sensor optical, reflective, 37x21x10mm, Other, Point, Teach-In, Sn: 1200, 15-30V DC, PNP Anticoincidence, IO-Link, Connector M8 4pin, IP67, Plastic ABS+PMMA, With polarizing filter, For transparent objects



Detection of transparent materials

Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.

Electrical features

Response/decay time	0.5ms
Display	LED display
Type of switching function	Exclusive-OR
Type of electrical connection	Connector M8
Type of switching output	PNP
Rated switching current	100mA
Readiness delay	50ms
Setting procedure	Teach-In
Short-circuit protection	Yes
No-load current	15mA
Number of pins	4
Residual ripple	10%
Switching distance	0 - 1200mm
Switching frequency	1000Hz
Scanning function	Light-/dark-on mode
Reverse polarity protection	Yes
Decay time	0.5ms
Operating voltage (DC)	15 - 30V
With polarizing filter	Yes
Output functions	Switching point

Mechanical features

Design	Cuboid
Width	10mm
Sensor width	10mm
Height	37mm
Length	21.1mm
Degree of protection (IP)	IP67
Volume	Small
Material of optical surface	PMMA
Housing material	Plastic ABS
Transparent material detection	Yes
Ambient temperature	-25 - 55°C

Optical features

Light source	other
Light beam form	Point
Wavelength of the sensor	275nm
Light spot diameter at focal point	5.5mm

Other features

IO-Link version	V1.0.1
Reference medium / object	AO000007
Ambient temperature	-25 - 55°C


Classification

ETIM 8	EC002717 Retro-reflective sensor
eClass 7.0	27270902
eClass 7.1	27270902
eClass 8.0	27270902
eClass 9.0	27270902
eClass 9.1	27270902

More

IPF Product Group	100 optical sensors
packaging dimensions	210 x 180 x 15 mm
gross weight	22 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

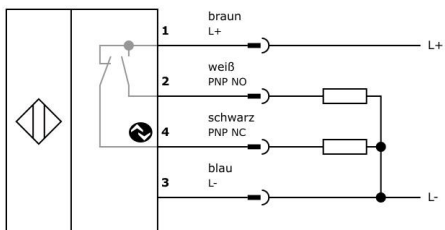

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: www.ipf-electronic.com

Dimensional drawing

