

OY410023

Optical sensors • Light curtains

light curtain, 500x20x40mm, field height 458, resolution 14mm, Sn: 0.3-4m, 22-26V DC, 0-10V/4-20mA, Cable with connector 4pin 0.3m, IP65, Aluminum+PMMA



The multi-function light barriers are through-beam sensors where multiple beams are integrated. In case of interruption of only one beam, the switching output of the receiver changes its state. The devices are used where standard through-beam sensors with only one beam are not sufficient. There are devices with beam spacing of 20, 40, 60 or 120mm and different heights available. An integrated fuzzy logic controls the transmitting power automatically.

Electrical features

Resolution	14mm
Type of analog output	0 - 10V 4 - 20mA
Type of electrical connection	Cable connector
Short-circuit protection	Yes
No-load current, receiver	100mA
No-load current, transmitter	100mA
Number of pins	4
Number of pins, receiver	4
Number of pins, transmitter	4
Reaction time	3ms
Reverse polarity protection	Yes
Operating voltage (DC)	21,6 - 26,4V
Measuring range	300 - 4000mm

Mechanical features

Number of cores	4
Width	40mm
Sensor width	40mm
Field height	458mm
Height	500mm
Cable length	0.3m
Length	20.5mm
Degree of protection (IP)	IP65
Cover material	Plastic
Material of optical surface	PMMA
Housing material	Aluminum
Ambient temperature	-5 - 50°C

Other features

Explosion safety category for gas	none
Explosion safety category for dust	none
Scope of delivery	Transmitter and receiver
Ambient temperature	-5 - 50°C


Classification

ETIM 8	EC002549 Light curtain
eClass 7.0	27270910
eClass 7.1	27270910
eClass 8.0	27270910
eClass 9.0	27270910
eClass 9.1	27270910

More

IPF Product Group	109 optical sensors (analog)
packaging dimensions	580 x 70 x 70 mm
gross weight	906 g
Customs tariff number	85365019
WEEE number	40951076
Reach-compliant	Yes
RoHS-compliant	Yes

Connection

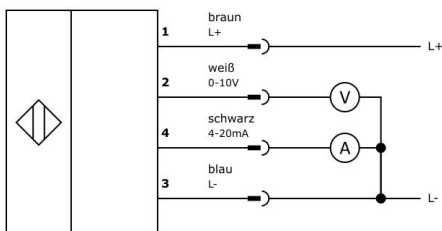

Installation



Mounting / installation may only be carried out by a qualified electrician!

Disposal



Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information.

Never use these devices in applications where the safety of a person depends on their functionality.

For suitable connection and mounting accessories, please refer to our website www.ipf-electronic.com.

Dimensional drawing

